
SWIMMING POOL – NEW CONSTRUCTION WITH TILES

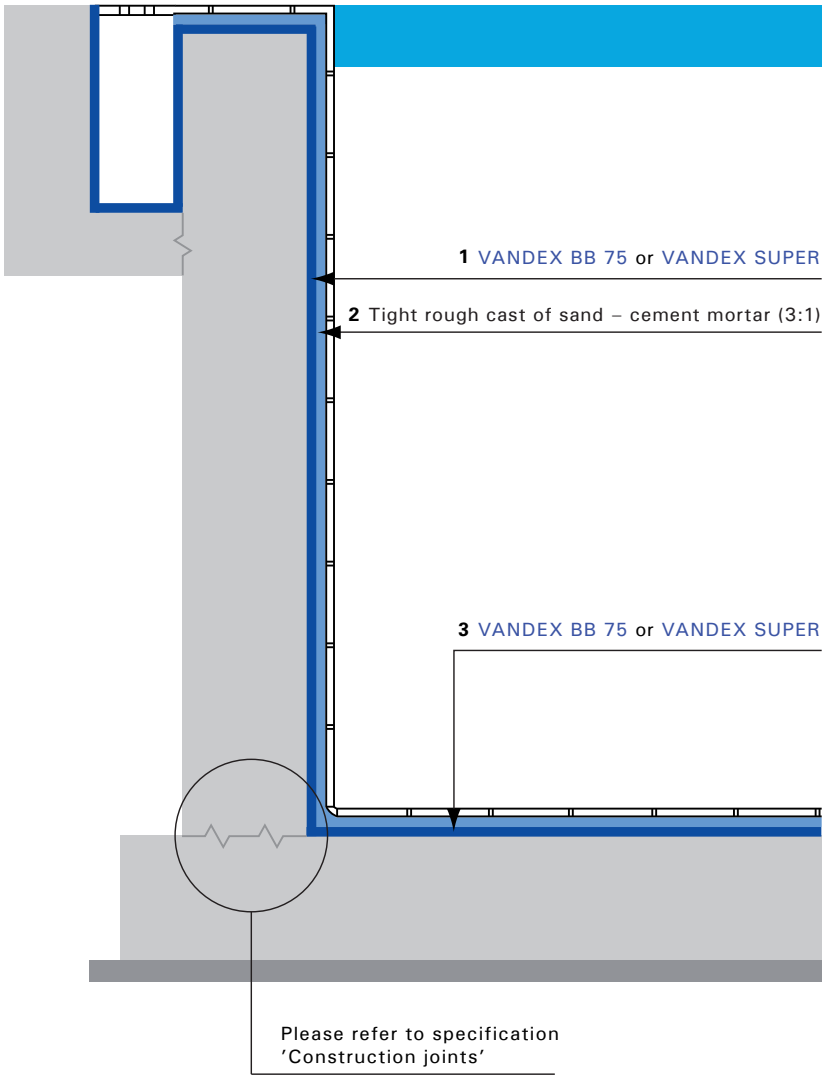

Application Instructions

1 Apply two coats of VANDEX BB 75 or alternatively two coats of VANDEX SUPER to the vertical surfaces.

2 Onto the vertical surface apply a tight rough cast of sand and cement mortar (3:1) covering approx. 50 % of surface, applied 'green on green' to the Vandex lining.

3 Apply two coats of VANDEX BB 75 or one coat of VANDEX SUPER to horizontal surfaces.

Remark:

- Substrate adhesion strength > 1.5 N/mm^2

For further technical details and consumptions refer to technical data sheet or consult a technical Vandex representative.

The information contained herein is based on our long-term experience and the best of our knowledge. We can, however, make no guarantee since for a successful outcome, all circumstances in an individual case must be taken into consideration. Indications of quantities required are only averages which in certain cases might be greater.

HEAD OFFICE AND INTERNATIONAL SALES:
Vandex International Ltd
P.O. Box · CH-4501 Solothurn/Switzerland
+41 32 626 36 36 · info@vandex.com · www.vandex.com

PRODUCTION:
Vandex Isoliermittel-Gesellschaft m.b.H.
P.O. Box · D-21487 Schwarzenbek/Germany

An RPM Company

VXISPECSE0612