
BELOW GROUND CONCRETE BLOCK WALL AND SLAB – INTERNAL WATERPROOFING

Scope:
Internal waterproofing of new or existing concrete block wall/brick wall and slab structures not subject to hydrostatic pressure.

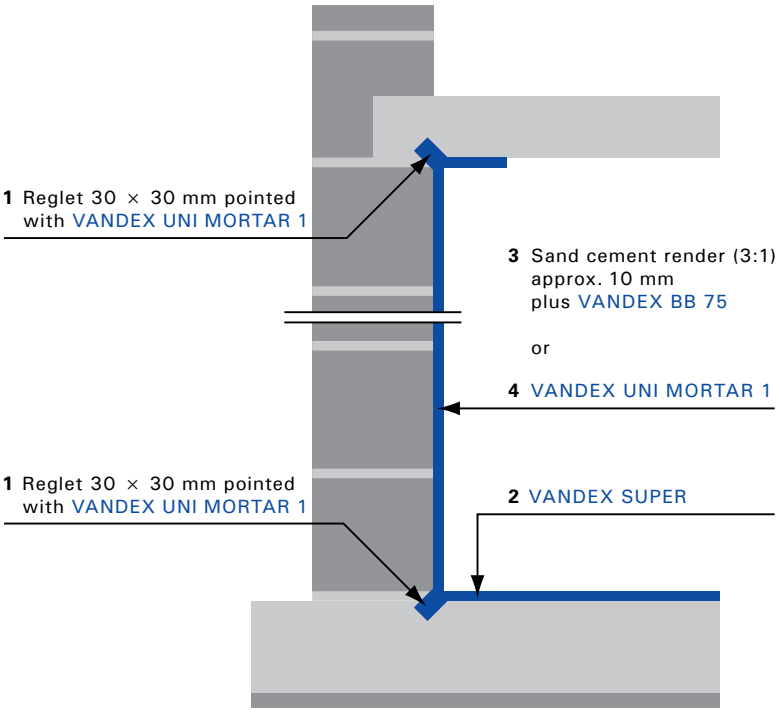

Application Instructions

1 Optional: Apply a coved fillet with a suitable mortar, preferably with VANDEX UNI MORTAR 1 at the wall / floor junction.

2 Apply one coat of VANDEX SUPER to the slab surface and footing.

3 Apply a sand cement render (3:1) to a thickness of approx. 10 mm to the vertical surface. On top of the roughened surface apply one coat of VANDEX BB 75.

or

4 Apply a single layer VANDEX UNI MORTAR 1, if substrate is rough.

Remark:
- Substrate adhesion strength > 1.5 N/mm^2

For further technical details and consumptions refer to technical data sheet or consult a technical Vandex representative.

The information contained herein is based on our long-term experience and the best of our knowledge. We can, however, make no guarantee since for a successful outcome, all circumstances in an individual case must be taken into consideration. Indications of quantities required are only averages which in certain cases might be greater.

HEAD OFFICE AND INTERNATIONAL SALES:
Vandex International Ltd
P.O. Box · CH-4501 Solothurn/Switzerland
+41 32 626 36 36 · info@vandex.com · www.vandex.com

PRODUCTION:
Vandex Isoliermittel-Gesellschaft m.b.H.
P.O. Box · D-21487 Schwarzenbek/Germany

An RPM Company

VXISPECSE0612